


ePowerSwitch 1G

The ePowerSwitch 1G is the smallest stand-alone power distribution unit from Neol. 1 current input with 10A and 1 power outlet offering high versatility together with the extensive configuration and control options.

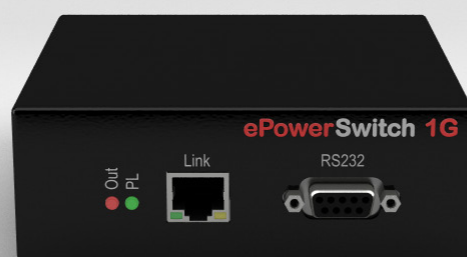

Neol S.A.S.
4 Rue Nationale
67800 Bischheim
France

+33 388/623752
+33 388/333772
sales@neol.com
www.neol.com

Description

The ePowerSwitch 4 offers numerous usages to control, manage and monitor any device. The configuration of the sockets via the integrated webserver is flexible and comfortable.

The sockets are available for nearly any european standards (SCHUKO, FR, UK, CH). The device can be installed as required. By using an optional 19" mounting kit up to 4 ePowerSwitch 1G can be installed in 1U.



Rear connection features

- 1 IEC320 input
- 1 IEC320 output

Front connection features

- Status-LED for power
- RJ45 connection
- RS232 connection

Power Distribution

Each socket can be switched on/off and restarted via IP or RS232 interface. This can be done by the web interface, a KVM switch, SNMP, or any serial interface. They can also be switched single or as individually created group of outlets. The sequential on and off switching of each outlet prevents resulting peak loads within the IT environment.

The sockets are equipped with extremely robust HiAmp relay for high inrush currents. Individual delays (1-255 seconds when you next switch, 1-3600 seconds when restarting) can be configured for the switching process.

Monitoring

Device monitoring

The monitoring of connected devices is realized through the use of a ePowerSwitch Master. It can monitor up to 40 IP addresses with ping or scan commands and send a message (SNMP trap, e-mail, syslog) in case of a crash automatically. If the monitored IP devices are powered by the ePowerSwitch they can be automatically restarted.

With the ePowerSwitch 4 flexible and affordable solutions for power management of servers or other devices are possible. The areas of application are not only limited to the IT environment.

Management

The management and control of the device using the integrated web server through the web browser is quite simple. Moreover, it is possible to send switching commands via a connected KVM switch or a terminal console.

Authentication

All current ePowerSwitch devices use a nonce (cryptographic nonce) and a hash function for authentication so the access can not be reconstructed or manipulated. To support fully encrypted transmission of data corresponding devices are available (eg. ePowerSwitch 8XM or VizioGuard).

User accounts

The administrator can create up to 40 user accounts with different rights via the web interface. Access to the webserver is protected by 32-character user names and passwords. In addition, up to 40 users may simultaneously access the ePowerSwitch and all connected xBus peripherals.

Grouping of power outlets

The grouping of power outlets allows a server with redundant power supplies or multiple devices to be turned on/off with a command sent through a web browser or by SNMP.

Programmable rules

Up to 32 rules can be configured to monitor analog values and digital inputs. Pre-programmed actions will be triggered on alarm state which will switch eg. relay or sockets. Optional e-mails, SNMP traps or syslog messages can be sent.

Timer and scheduler

The device offers the possibility to automatically operate the power outlets by a timer and/or a scheduler function. Individual power outlets but also groups will be turned on/off at defined times. It is also possible to automatically send e-mail, SNMP traps and syslog messages with the scheduler. By using a Internet connection the option to trigger an action on remote ePowerSwitch devices is given.

Designations

Up to 32 characters long names can be set to all devices and sensors connected. This unique identification simplifies the programming of rules, groups and the associated actions.

Online help

An intuitive interface and context-sensitive online help allow administrators to quickly enable various and powerful features of the system. Detailed instructions and explanations are listed in the operating instructions.

Features at a glance

- Remote control of a single power outlet
- Control and administration over IP and RS23
- Monitoring of IP devices with automatic restart function
- Reboot the server (shutdown) via the RS232 serial port
- Wake on LAN
- Access with username and password (1 administrator account and 40 user accounts with concurrent access)
- Free terms for the ePowerSwitch, rules and power input/output
- Simple and fast configuration
- Firmware update over network


Technical data

Power input	1 IEC320 EN60320 C14 (M) Nominal voltage: 230V / 50Hz Max. current: 10A
Power output	1 IEC320 EN60320 C13 (F) Nominal voltage: 230V / 50Hz Max. current: 10A
Network standards	IEEE 802.3, 10/100 Mbit/s
Network protocols	TCP/IP, HTTP
Network connection	RJ45 for UTP CAT5
Max. network cable length	100 m
Terminal connection	RS232, SUB D9 female
Connection Bus	RS485, RJ45
LED	Power, Network, Socket
Operating temperature	0°C to +40°C
Operating humidity	10% to 80%
Dimensions (W x H x D)	185 x 43 x 103
Weight	1 kg
Approvals	CE, EN55022 & EN55024, RoHS
Guarantee	2 years repair/replace


Package contents

- 1 EPS 1G-XX (where XX is the specification of the power plug)
- 1 power cord, 1,80 meters IEC-320-C13 / EU, CH or UK standard -
EU = SCHUKO/Europe, CH = Swiss, UK = United Kingdom
- 1 Network cable
- 1 serial cable (SUB-D9 male/female) 1,80 meters
- 1 CD-ROM with english manual and Windows IP configuration tool

Application example

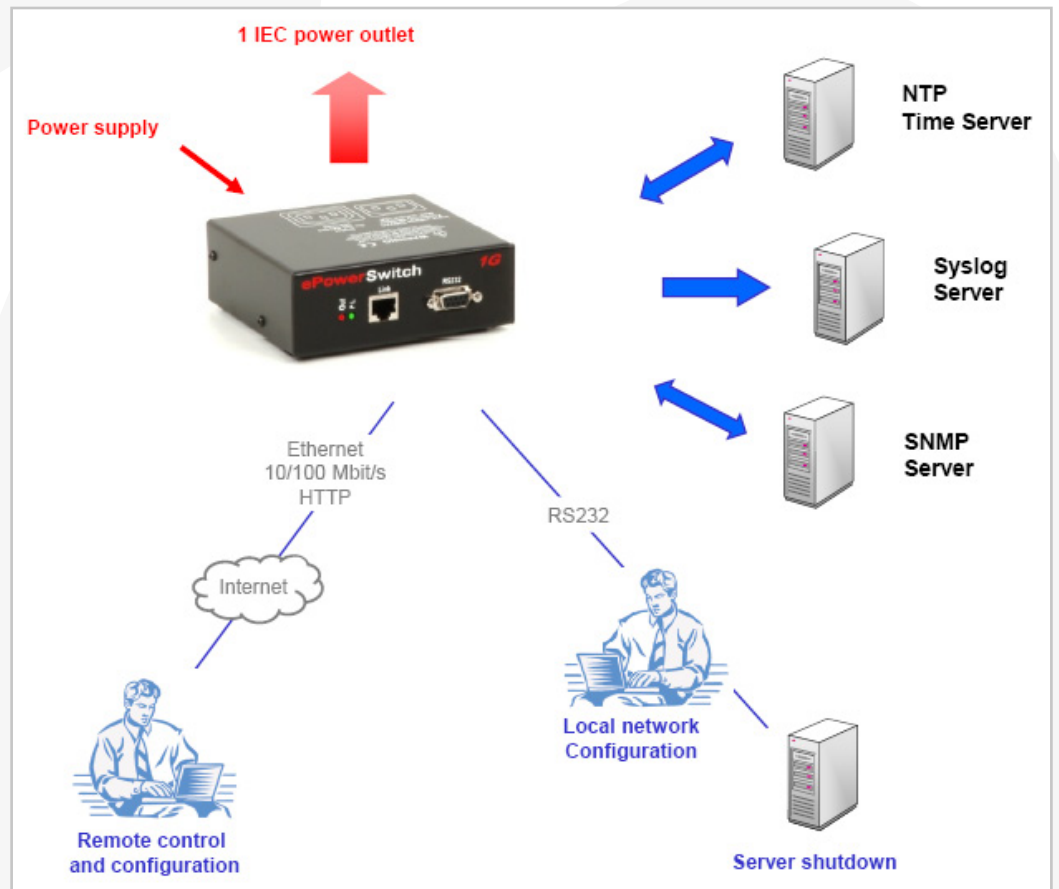

DISTRIBUTOR



Neol S.A.S.
4 Rue Nationale
67800 Bischheim
France

+33 388/623752
+33 388/333772
sales@neol.com
www.neol.com